

# **Fortinet**


## Exam Questions NSE6\_FML-6.4

Fortinet NSE 6 - FortiMail 6.4





**NEW QUESTION 1** Refer to the exhibit.

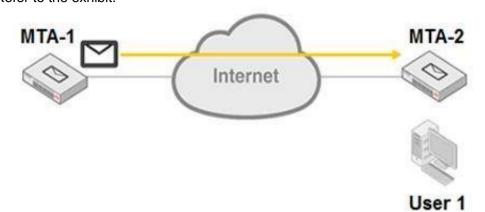

MTA-1 is delivering an email intended for User 1 to MTA-2. Which two statements about protocol usage between the devices are true? (Choose two.)

- A. User 1 will use logs were generated load the email message from MTA-2
- B. MTA-2 will use IMAP to receive the email message from MTA-1
- C. MTA-1 will use POP3 to deliver the email message to User 1 directly
- D. MTA-1 will use SMTP to deliver the email message to MTA-2

## Answer: AD

## **NEW QUESTION 2**

An administrator sees that an excessive amount of storage space on a FortiMail device is being used up by quarantine accounts for invalid users. The FortiMail is operating in transparent mode. Which two FortiMail features can the administrator configure to tackle this issue? (Choose two.)

- A. Automatic removal of quarantine accounts
- B. Recipient address verification
- C. Bounce address tag verification
- D. Sender address rate control

## Answer: AD

## **Explanation:**

Reference: https://fortinetweb.s3.amazonaws.com/docs.fortinet.com/v2/attachments/9aa62d26-858d-11ea-9384-00505692583a/FortiMail-6.4.0-Administration\_Guide.pdf (322, 323)

## **NEW QUESTION 3**

Which firmware upgrade method for an active-passive HA cluster ensures service outage is minimal, and there are no unnecessary failovers?

- A. Break the cluster, upgrade the units independently, and then form the cluster
- B. Upgrade both units at the same time
- C. Upgrade the standby unit, and then upgrade the active unit
- D. Upgrade the active unit, which will upgrade the standby unit automatically

## Answer: B

## **Explanation:**

Reference: https://docs.fortinet.com/document/fortimail/6.2.0/administrationguide/725928/upgrading-firmware- on-ha-units

**NEW QUESTION 4** Refer to the exhibit.



Session Profile				
Profile name: Example_Session				
SMTP Limits				
Restrict number of EHLO/HELOs per session to:	3	1001		
Restrict number of email per session to:	10	наран		
Restrict number of recipients per email to: 500				
Cap message size (KB) at:	51200	1000		
Cap header size (KB) at:	10240	NAME		
Maximum number of NOOPs allowed for each connection:	10	nyayan		
Maximum number of RSETs allowed for each connection:	20	1000		

ortiMail		
Domain name:	example.com	
Relay type:	Host 👻	
	SMTP server: 10.29.1.45	Port: 25 [Test]
	Use SMTPS	
	Fallback SMTP server:	Port: 25 [Test]
	Use SMTPS	
0	Relay Authentication	

Vebmail theme:	Use system set	ttings 🔻	
Webmail language:	Default	-	
Maximum message size (KB):	204800	mpages 1	
SMTP greeting (EHLO/HELO)	name (as client):	Use syste	em host name 💌
IP pool:None	-	Direction:	Delivering -
Remove received header of	f outgoing email		

Which message size limit will FortiMail apply to the outbound email?

A. 204800

- B. 1024
- C. 51200 D. 10240
- D. 10240

Answer: A

## **NEW QUESTION 5**

A FortiMail administrator is investigating a sudden increase in DSNs being delivered to the protected domain for undeliverable email messages. After searching the logs, the administrator identifies that the DSNs were not generated as a result of any outbound email sent from the protected domain. Which FortiMail antispam technique can the administrator use to prevent this scenario?

A. Spam outbreak protection

B. Bounce address tag validation

C. Spoofed header detection D. FortiGuard IP Reputation


#### Answer: A

#### **Explanation:**

Reference: https://docs.fortinet.com/document/fortimail/6.2.0/administrationguide/769204/managing-the-mail- queue

## **NEW QUESTION 6**

Refer to the exhibit.

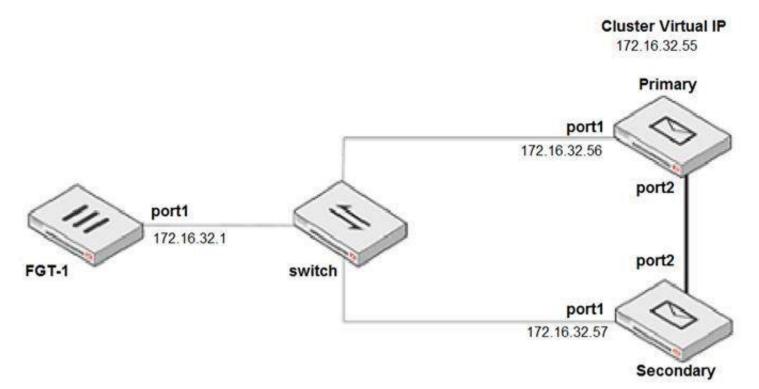

**Primary HA Interface Configuration** 

Port:	port1	
Enable port monitor		
Heartbeat status:	Disable	
Peer IP address:	0.0.0.0	
Peer IPv6 address:		
Virtual IP action :	Iphone	
Virtual IP address:	0.0.0.0	/ 0
Virtual IPv6 address	-	/ 0

The exhibit shows a FortiMail active-passive setup.

Which three actions are recommended when configuring the primary FortiMail HA interface? (Choose three.)

- A. Disable Enable port monitor
- B. In the Heartbeat status drop-down list, select Primary
- C. In the Peer IP address field, type 172.16.32.57
- D. In the Virtual IP action drop-down list, select Use
- E. In the Virtual IP address field, type 172.16.32.55/24

Answer: ABD

## **NEW QUESTION 7**

Which FortiMail option removes embedded code components in Microsoft Word, while maintaining the original file format?

- A. Behavior analysis
- B. Impersonation analysis
- C. Content disarm and reconstruction
- D. Header analysis

Answer: C

## Explanation:

Reference: https://fortinetweb.s3.amazonaws.com/docs.fortinet.com/v2/attachments/8c063dd3-bafe-11e9-a989-00505692583a/fortimail-admin-620.pdf (435)

## **NEW QUESTION 8**

Which statement about how impersonation analysis identifies spoofed email addresses is correct?

A. It uses behavior analysis to detect spoofed addresses.B. It maps the display name to the correct recipient email address.C. It uses DMARC validation to detect spoofed addresses.D. It uses SPF validation to detect spoofed addresse

## Answer: A

## **NEW QUESTION 9**

Examine the FortiMail session profile and protected domain configuration shown in the exhibit; then answer the question below.



https://www.surepassexam.com/NSE6\_FML-6.4-exam-dumps.html (56 New Questions)

	Session F	rofile
Profile name:		
<ul> <li>Connection Settings</li> </ul>		
- Sender Reputation		
- Endpoint Reputation		
- Sender Validation		
▼ Session Settings		
Unauthenticated Session Settings		
SMTP Limits		
Restrict number of EHLO/HELOs per session to:	3	
Restrict number of email per session to:	10	
Restrict number of recipients per email to:	500	
Cap message size (KB) at:	51200	
Cap header size (KB) at:	10240	
Maximum number of NOOPs allowed for eac	h connection:	10
Maximum number of RSETs allowed for each	connection:	20

omain name: example.com						
s subdomain Main domain:				~		
DAP User ProfileNone				~		
Advanced Settings     Mail Routing LDAP profile     Remove received header	the second second	1			~	
Webmail theme: Use system		~				
Webmail language: Use sys	tem settings		~			
Maximum message size(KB):	204800					
Automatically add new users	to address book:	Dom	ain			~

Which size limit will FortiMail apply to outbound email?

### A. 204800

- B. 51200
- C. 1024
- D. 10240

#### Answer: B

Explanation:

domain only applies to inbound. https://kb.fortinet.com/kb/viewContent.do?externalId=FD31006&sliceId=1

## **NEW QUESTION 10**

Examine the FortiMail antivirus action profile shown in the exhibit; then answer the question below.



https://www.surepassexam.com/NSE6\_FML-6.4-exam-dumps.html (56 New Questions)

	AntiVirus Action					
		AntiVirus Ac	tion Profile	84		
Domain:	internal.lab		~			
Profile name:	AC_Action					
Direction	Incoming		*			
🔲 Tag email	's subject line				With value:	
Insert new	header				With value:	
Deliver to	alternate host					
■ ► BCC Replacerial	infected/suspicious boo	dy or attachment(s	)			
Notify with	profile	None		*	New	Edit
Reject		None		*	New	Edit
Discard						
<u> </u>	uarantine to folder	None		*	New	Edit
Repacka	te recipient email addre ge email with customis ge email with original riginal email will be wrapped	ed content* text content*				

What is the expected outcome if FortiMail applies this action profile to an email? (Choose two.)

A. The sanitized email will be sent to the recipient's personal quarantine

B. A replacement message will be added to the email

C. Virus content will be removed from the email

D. The administrator will be notified of the virus detection

Answer: BC

## **NEW QUESTION 11**

Examine the nslookup output shown in the exhibit; then answer the question below.

C:\>nslookup -type=mx	example.com
	ondan provosal
Server: PriNS	
Address: 10.200.3.254	
Non-authoritative ans	wer:
example.com	MX preference = 10, mail exchanger = mx.hosted.com
example.com	MX preference = 20, mail exchanger = mx.example.com

Identify which of the following statements is true regarding the example.com domain's MTAs. (Choose two.)

- A. External MTAs will send email to mx.example.com only if mx.hosted.com is unreachable
- B. The primary MTA for the example.com domain is mx.hosted.com
- C. The PriNS server should receive all email for the example.com domain
- D. The higher preference value is used to load balance more email to the mx.example.com MTA

Answer: AB



## **Thank You for Trying Our Product**

## We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questons and Answers in PDF Format

## **NSE6\_FML-6.4 Practice Exam Features:**

- \* NSE6\_FML-6.4 Questions and Answers Updated Frequently
- \* NSE6\_FML-6.4 Practice Questions Verified by Expert Senior Certified Staff
- \* NSE6\_FML-6.4 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- \* NSE6\_FML-6.4 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year

100% Actual & Verified — Instant Download, Please Click Order The NSE6\_FML-6.4 Practice Test Here